


# 550 Cushion Ease™

Modular rubber anti-fatigue mat

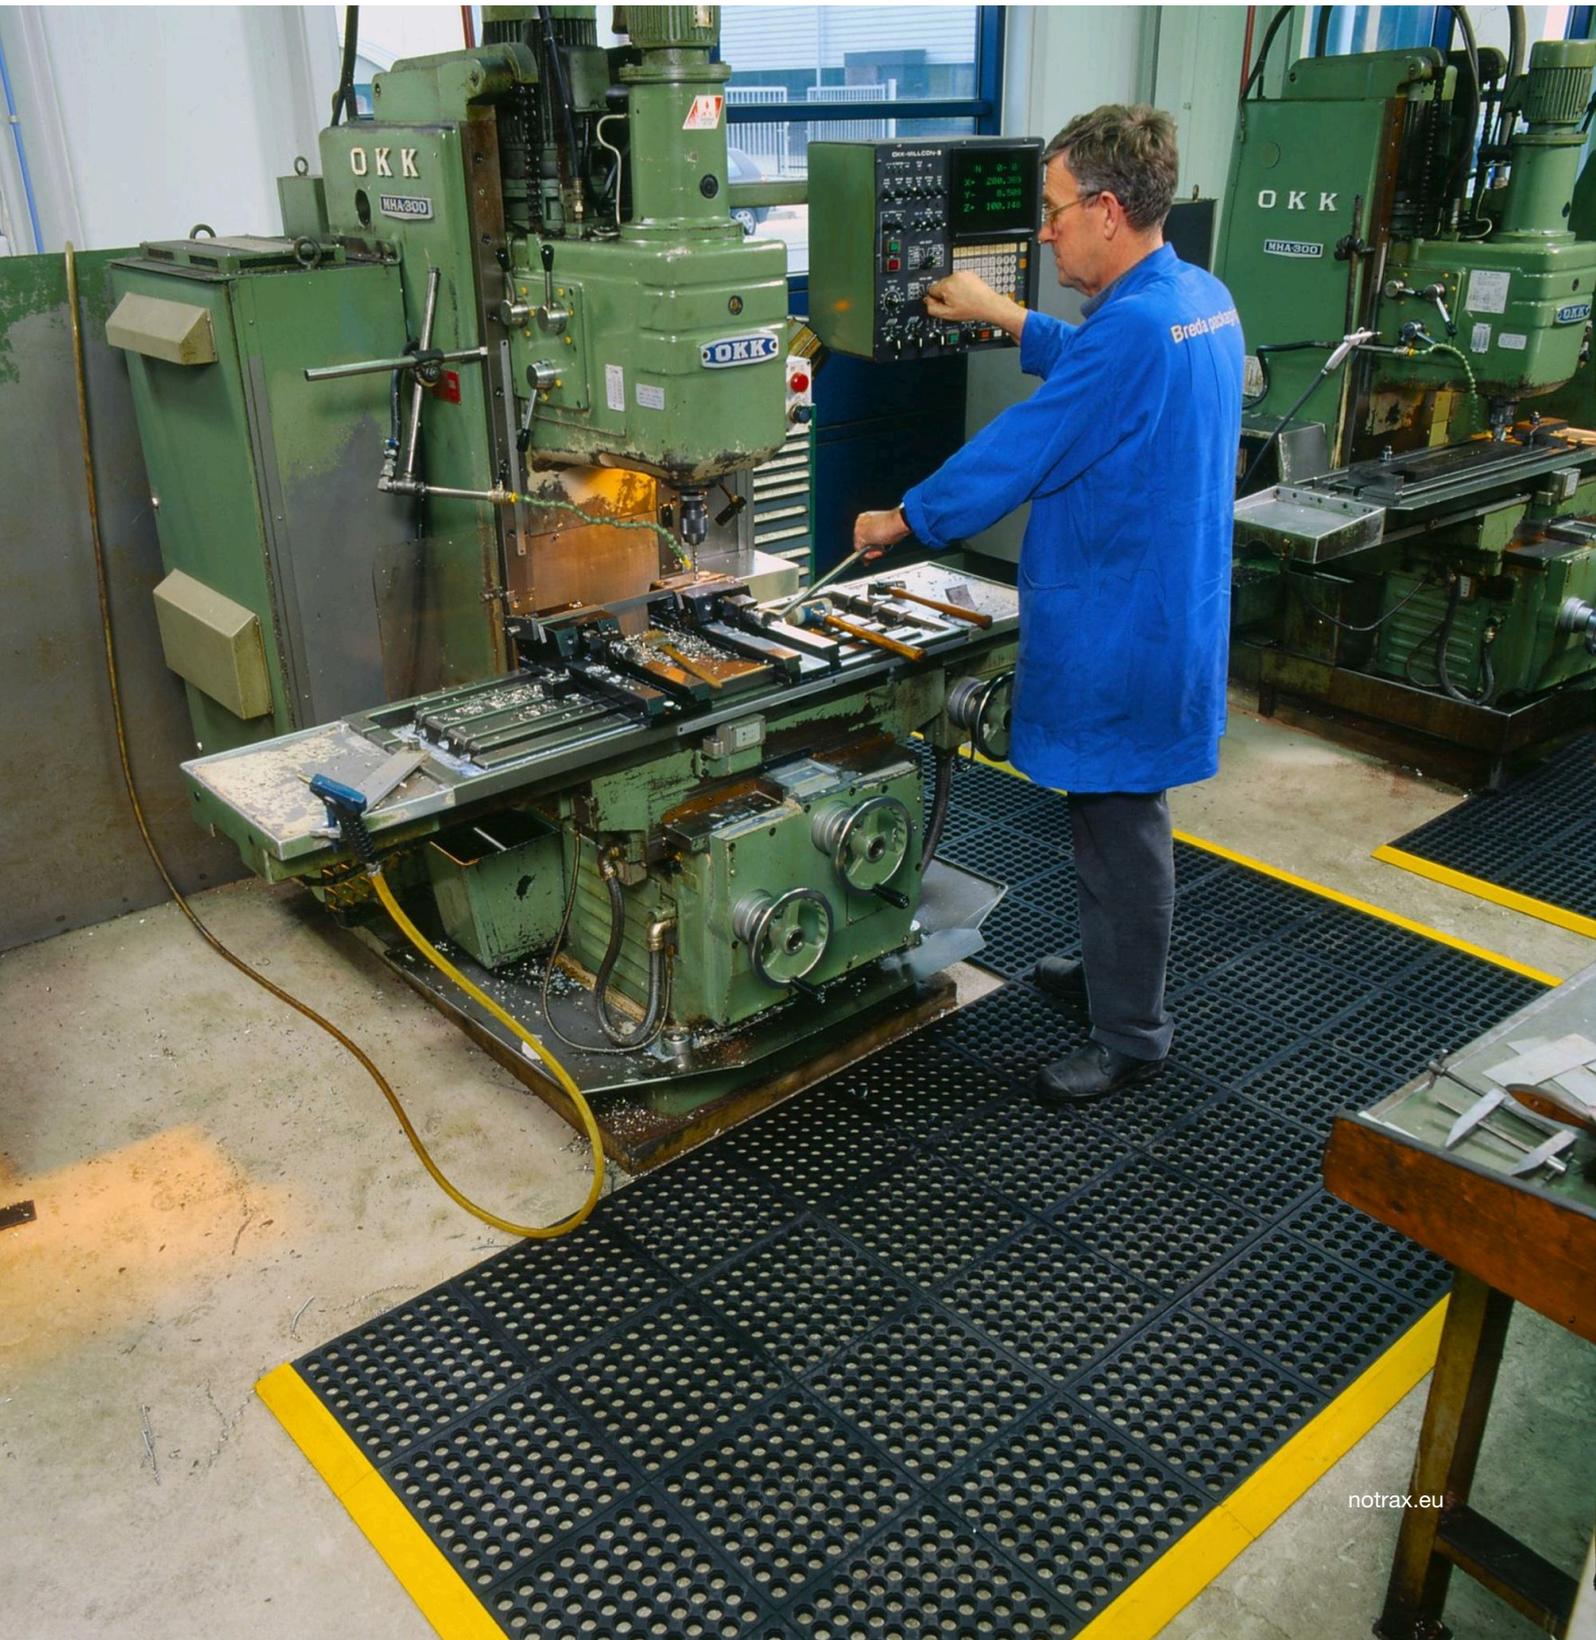

# Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting 550 Cushion Ease™

Modular rubber anti-fatigue mats with holes for excellent drainage and aeration leaving a dry, clean work area. Superb anti-fatigue properties due to its unique design underneath and high quality resilient rubber compounds.

- Square snap-together units of 91 cm x 91 cm that can be assembled effortlessly and laid out from wall-to-wall or as islands in any direction or shape
- Compatible with patented MD Ramp System™ for smart safety bevelling solutions
- Designed to yield a long service life
- 100% natural rubber compound

#### Recommended use

- Wet Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

#### Colors:

- Black

#### Sizes:

- 91cm x 91cm
- per m<sup>2</sup>

#### Accessories:

- 552 MD-X Ramp System™ Nitrile
- INS INSTALLATION
- 651 M.D. Fire Retardent Ramp System
- 551 MD Ramp System™ Nitrile



WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE

# Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting Cushion Ease™

## General

Brand	Notrax
Category	Wet Areas Modular Matting
Product Number	550
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Cushion Ease™
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	Cushion-Ease®
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Wet/ Dry Areas - Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

## Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
US Warranty	5
Warranty	1

## Tests

Abrasion Resistance 1000	2.6% weight loss (5000 cycles)
Compression Deflection 1.4	0.37 cm
Compression Deflection 2.8	0.53 cm
Fire rating US	Pass
Hardness	68 Shore A
Coefficient Friction Dry	0.71
Surface Flammability	Pass
Tear Strength	32.1lb

## Technical Specifications

Application	Wet areas
Breaking Load	33.2lb
Edges	Attachable bevelled edges are available
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

# Cushion Ease™ Black

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
550S0033BL	91cm x 91cm	10.8	1.9
550S0000BL	per m2	11.6	1.9

## Accessories

552 MD-X Ramp System™ Nitrile	INS INSTALLATION	651 M.D. Fire Retardent Ramp System	551 MD Ramp System™ Nitrile
-------------------------------	------------------	-------------------------------------	-----------------------------