


829 Anti-Stat POP™ 3 Layer

Tri-layer static dissipative ESD table liner

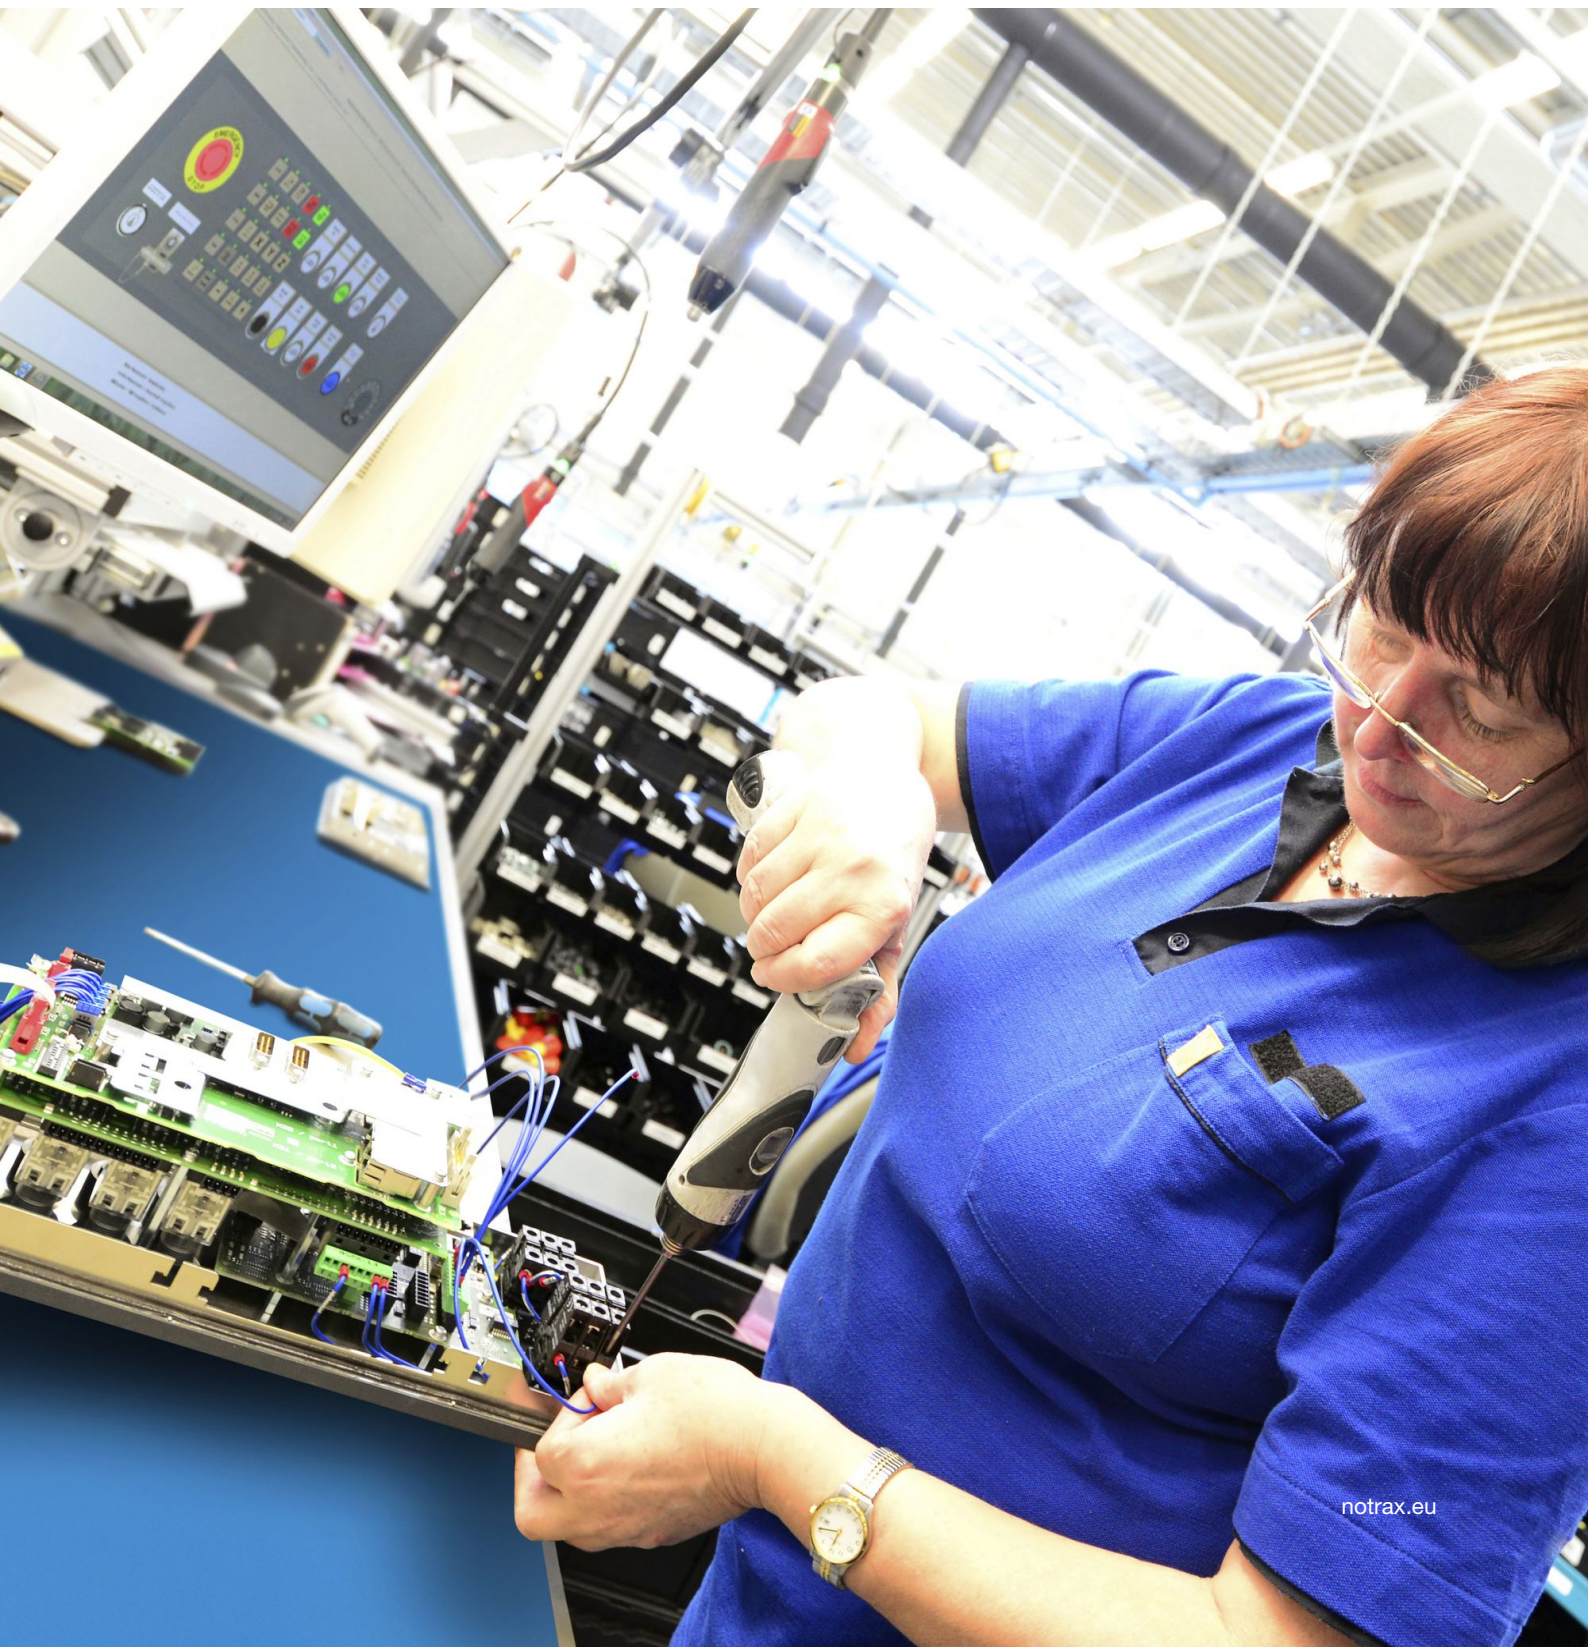

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

829 Anti-Stat POP™ 3 Layer

Static dissipative vinyl runner with tri-layer construction and a conductive center for extremely stable load dissipation. Protects sensitive components safe from damaging static shocks.

- Microcellular vinyl foam treated with dissipative static properties
- Meets EOS/ESD-S4, measured resistance $R_g 10^7 \Omega$ and $R_p 10^8 \Omega$
- Electrostatic charge (walking test), meets ISO6356 and EN1815

Recommended use

- Dry Areas
- For use in ESD working zones to protect electrostatic sensitive components
- Medium duty

Colors:

- Blue
- Grey

Sizes:

- 60.96cm x 1524cm
- 61cm x 1524cm
- 76.2cm x 1524cm
- 91.4cm x 1524cm
- 61cm x linm
- 76.2cm x linm
- 91.4cm x linm

Accessories:

- 057 ESD Mat Cleaner
- 056 ESD Wrist Band
- 052 ESD Common Grounding Cord
- 055 ESD Heel Grounder
- 051 ESD Floor Grounding Cord
- 054 ESD Earth Bonding Plug
- 053 ESD Coil Cord



Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

Anti-Stat POP™ 3 Layer

General

Brand	Notrax
Category	ESD Matting & Accessories
Product Number	829
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Anti-Stat POP™ 3 Layer
Recommended use	For use in ESD working zones to protect electrostatic sensitive components
Shipping Location	Barendrecht 2992SB, The Netherlands
Type	Electrostatic Discharge (ESD) Protection
Update trigger	20210310-1301
Usage Intensity	Medium duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material
Warranty	1

Tests

Elongation	125% minimum
Hardness	85 Shore A
Static Charge	3.0×10^7
Surface Flammability	Pass
Tear Strength	150 lb/in

Technical Specifications

Application	Industrial Environments
Backing	Microcellular PVC foam
Edges	Bevelled edges on all sides
Material	Microcellular vinyl
Material Group	Vinyl
Process	Foaming
Temperature Range	-28 ° C to + 93 ° C

Anti-Stat POP 3-Layer Grey

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
829C2450GY	61cm x linm	2.24	0.23813
829C3050GY	76.2cm x linm	2.6	0.23813
829C3650GY	91.4cm x linm	3.43	0.23813
829R2450GY	61cm x 1524cm	34.1	0.23813
829R3050GY	76.2cm x 1524cm	39.54	0.23813
829R3650GY	91.4cm x 1524cm	52.28	0.23813

Anti-Stat POP 3-Layer Blue

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
829C2450BU	61cm x linm	2.24	0.23813
829C3050BU	76.2cm x linm	2.6	0.23813
829C3650BU	91.4cm x linm	3.43	0.23813
829R2450BU	60.96cm x 1524cm	34.1	0.23813
829R3050BU	76.2cm x 1524cm	39.55	0.23813
829R3650BU	91.4cm x 1524cm	52.3	0.23813

Accessories

057 ESD Mat Cleaner	056 ESD Wrist Band	052 ESD Common Grounding Cord	055 ESD Heel Grounder
051 ESD Floor Grounding Cord	054 ESD Earth Bonding Plug	053 ESD Coil Cord	