

549 Safety Stance™

High quality anti-fatigue matting



Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting 549 Safety Stance™

High quality anti-fatigue matting for use in areas where there can be frequent oil spilling. Drainage holes and raised studs provide aeration and allow fluids and debris to fall through, leaving a dry and tidy top surface.

- Ergonomic benefit derived from 22 mm thick resilient worker platform
- Highly visible nitrile rubber orange coloured borders included on 3 sides for added safety
- Aggressive slip resistant surface

Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:



- Black
- Black/Orange

Sizes:

- 66cm x 102cm
- 90cm x 150cm
- 97cm x 163cm
- 97cm x 315cm
- per m2

Accessories:

- 552 MD-X Ramp System™ Nitrile
- 549K Safety Stance™ Connectors Black
- 549N Safety Stance™ Ramps Nitrile 5 mm
- INS INSTALLATION
- 551 MD Ramp System™ Nitrile

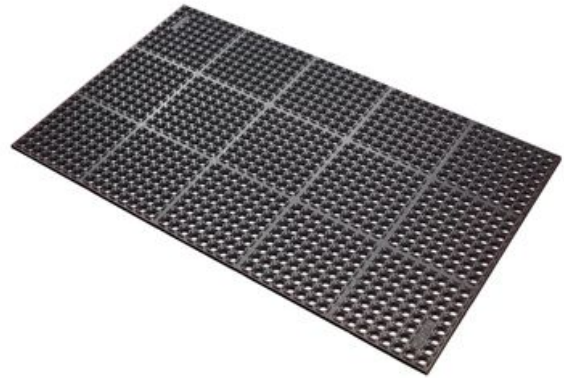

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE

Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting Safety Stance™

General

Brand	Notrax
Category	Wet Areas Modular Matting
Product Number	549
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Safety Stance™
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Wet / Oily Areas - Heavy Duty Nitrile Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
US Warranty	5
Warranty	1

Tests

Abrasion Resistance 1000	3.1%
Fire rating US	Pass
Hardness	33 Shore A
Coefficient Friction Dry	0.65
Surface Flammability	Pass

Technical Specifications

Application	Industrial Environments
Breaking Load	258.2%
Edges	Orange coloured borders included on 3 sides
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

Safety Stance™ Orange/Black

549S0000BL

549S3864OB

549S3124OB

549S2640OB

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
549S0000BL	per m2	13.8	2.2
549S3864OB	97cm x 163cm	21	2.2
549S3124OB	97cm x 315cm	37.2	2.2
549S2640OB	66cm x 102cm	8.8	2.2

Safety Stance™ Black - No Bevels

549S0035BL

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
549S0035BL	90cm x 150cm	15.7	2.2

Accessories

552 MD-X Ramp System™ Nitrile	549K Safety Stance™ Connectors Black	549N Safety Stance™ Ramps Nitrile 5 mm	INS INSTALLATION
551 MD Ramp System™ Nitrile			