

460 SkywalkerHD™

Heavy duty rubber tiles with a bubble pattern



Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting

460 SkywalkerHD™

Heavy duty rubber tiles can be easily assembled for coverage of large areas or individual workstations. Ergonomic benefit derived from a 13 mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

- 100% natural rubber compound
- A tooled grid of 30 cm x 30 cm sections on the underside of the mat makes further customization quick and easy
- Attachable bevelled edges prevent tripping and allow inside and outside corners

Recommended use

- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

Colors:


- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- INS INSTALLATION
- 440 SkywalkerHD o-Curve™
- 469 Skywalker HD Safety Line™
- 461 SkywalkerHD™ Safety Ramp Nitrile
- 430 Skywalker HD i-Curve™

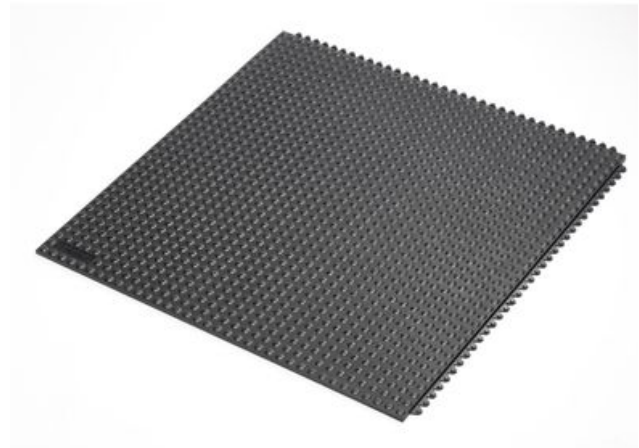

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE

Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Modular Matting SkywalkerHD™

General

Brand	Notrax
Category	Dry Areas Modular Matting
Product Number	460
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	SkywalkerHD™
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Series	Skywalker HD™
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Dry Areas - Modular Systems
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	0.824
Elongation	210%
Fire rating US	Pass
Hardness	67 Shore A
Slip Rating	R9
Surface Flammability	Pass
Tear Strength	10.5 N/mm

Technical Specifications

Application	Industrial Environments
Breaking Load	4.80 Mpa
Edges	Attachable bevelled edges are available
Material Group	Rubber
Process	Compression Moulding

SkywalkerHD™ Black

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
460S0033BL	91cm x 91cm	10.5	1.3
460S0000BL	per m2	12.3	1.3

Accessories

INS INSTALLATION	440 SkywalkerHD o- Curve™	469 Skywalker HD Safety Line™	461 SkywalkerHD™ Safety Ramp Nitrile
430 Skywalker HD i- Curve™			