


827 Anti-Stat POP™

Static dissipative vinyl work surface

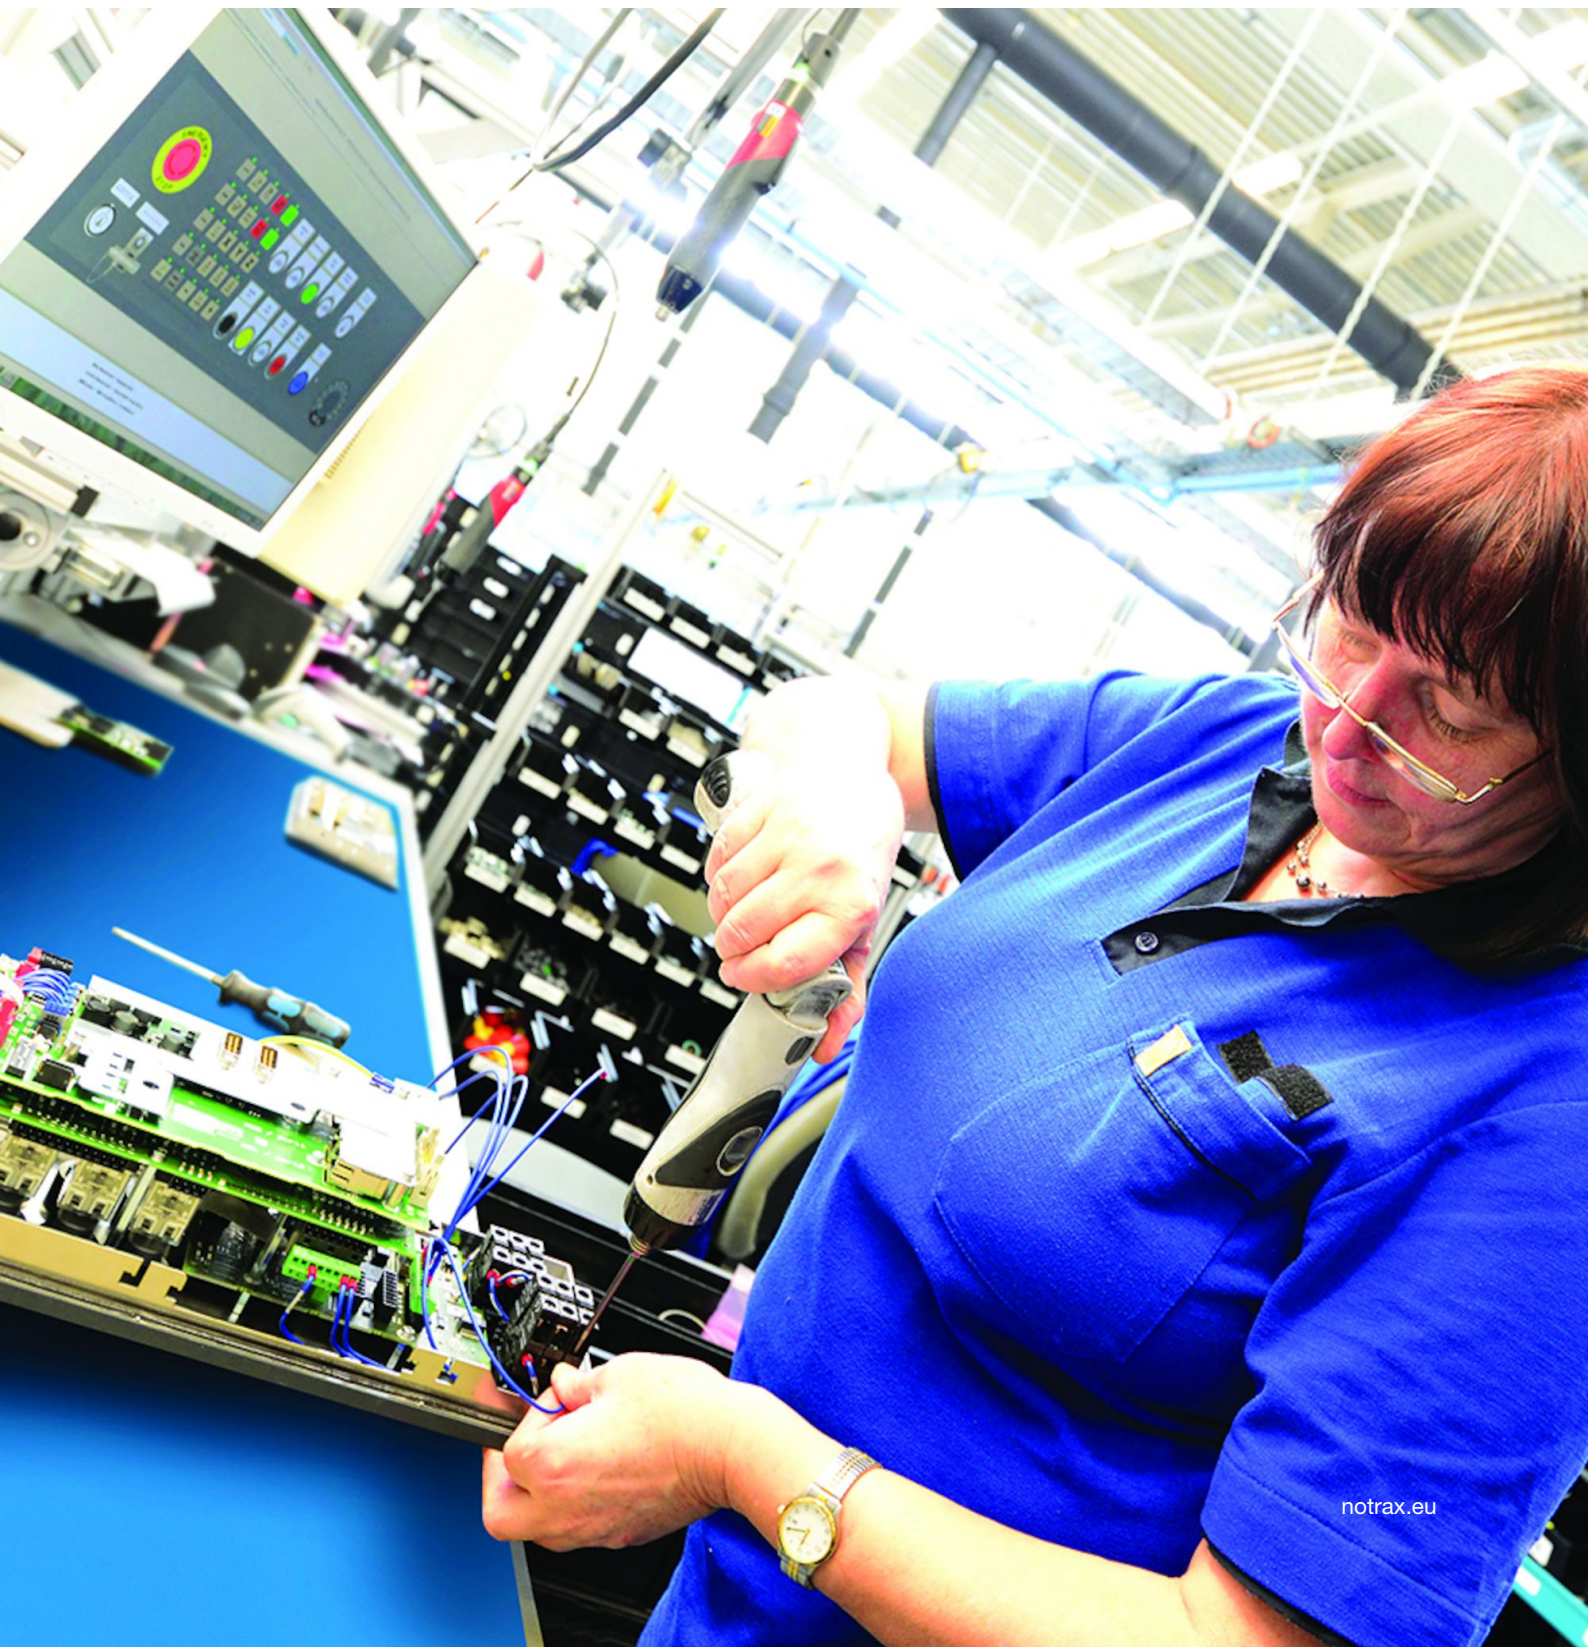

Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

827 Anti-Stat POP™

This product is temporarily unavailable due to a shortage of raw materials required to manufacture it. Please see the 826, 457, or 558 for a suitable alternative. Static dissipative vinyl work surface that static load from conductive items placed on it. Protects sensitive components safe from damaging static shocks.

- Microcellular vinyl foam treated with dissipative static properties
- Meets EOS/ESD-S4, measured resistance $R_g 10^7 \Omega$ and $R_p 10^8 \Omega$
- Electrostatic charge (walking test), meets ISO6356 and EN1815

Recommended use

- Dry Areas
- For use in ESD working zones to protect electrostatic sensitive components
- Medium duty

Colors:

- Blue

Sizes:

- 60cm x 1inm
- 76cm x 1inm
- 91cm x 1inm
- 60cm x 12.2m
- 76cm x 12.2m
- 91cm x 12.2m

Accessories:

- 825-C
- 057 ESD Mat Cleaner
- 056 ESD Wrist Band
- 052 ESD Common Grounding Cord
- 055 ESD Heel Grounder
- 051 ESD Floor Grounding Cord
- 054 ESD Earth Bonding Plug
- 053 ESD Coil Cord



Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories

Anti-Stat POP™

General

Brand	Notrax
Category	ESD Matting & Accessories
Product Number	827
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Anti-Stat POP™
Recommended use	For use in ESD working zones to protect electrostatic sensitive components
Shipping Location	Barendrecht 2992SB, The Netherlands, Moselle, MS 39459, United States
Type	Electrostatic Discharge (ESD) Protection
Update trigger	20210310-1301
Usage Intensity	Medium duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

ESD Rg	Rg $9.2 \times 10^7 \Omega$
ESD Rp	Rp $1.7 \times 10^7 \Omega$
Fire rating EU	En 13501-1 Cfl-S1
Fire rating US	Pass

Technical Specifications

Application	Industrial Environments
Edges	Bevelled edges on all sides
Material	Microcellular vinyl
Material Group	Vinyl
Process	Foaming

Anti-Stat P.O.P.™ Blue

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
827R3640BU	91cm x 12.2m	42	0.64
827R3040BU	76cm x 12.2m	36	0.64
827R2440BU	60cm x 12.2m	28	0.64
827C0036BU	91cm x linm	3.4	0.64
827C0024BU	60cm x linm	2	0.64
827C0030BU	76cm x linm	2.95	0.64

Accessories

825-C	057 ESD Mat Cleaner	056 ESD Wrist Band	052 ESD Common Grounding Cord
055 ESD Heel Grounder	051 ESD Floor Grounding Cord	054 ESD Earth Bonding Plug	053 ESD Coil Cord