


650SFR Cushion Ease™ Nitrile FR

Nitrile FR modular anti-fatigue mat

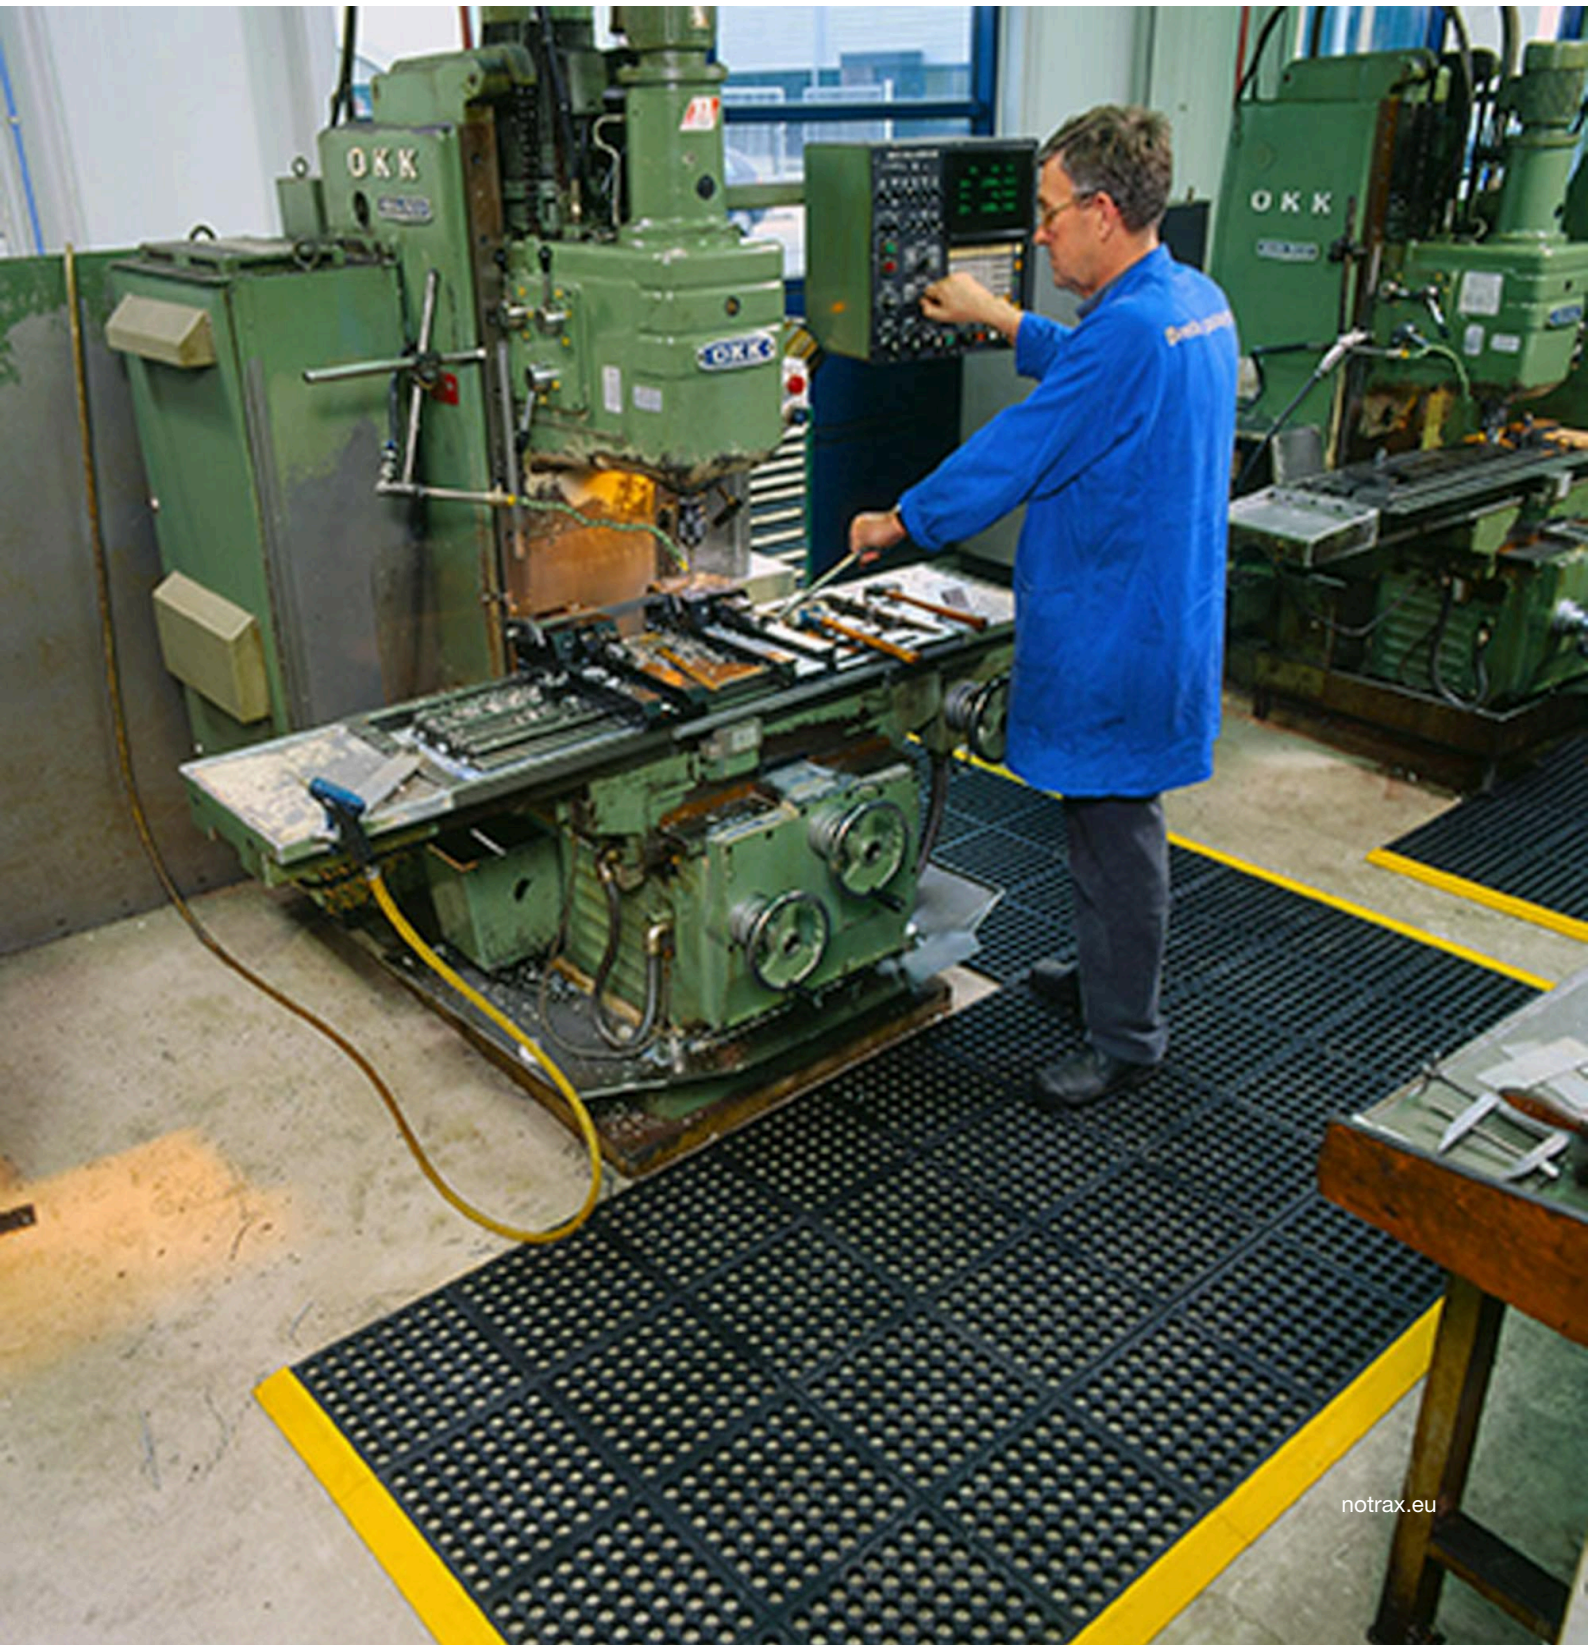

Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting 650SFR Cushion Ease™ Nitrile FR

Modular rubber anti-fatigue mats with holes for excellent drainage and aeration leaving a dry, clean work area. Superb anti-fatigue properties due to its unique design underneath and high quality resilient rubber compounds.

- Square snap-together units of 91 cm x 91 cm that can be assembled effortlessly and laid out from wall-to-wall or as islands in any direction or shape
- Compatible with patented MD Ramp System™ for smart safety bevelling solutions
- Designed to yield a long service life
- Resistant to most industrial oils and suitable for welding areas
- Fire classification Bfl-S1 tested according to EN 13501-1

Recommended use

- Wet/Dry and Oily Areas
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
- Heavy duty

Colors:

- Black

Sizes:

- 91cm x 91cm
- per m2

Accessories:

- 552 MD-X Ramp System™ Nitrile
- INS INSTALLATION
- 651 M.D. Fire Retardent Ramp System
- 551 MD Ramp System™ Nitrile



WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE

Ergonomic, Anti-fatigue & Safety Matting - Wet Areas Modular Matting Cushion Ease™ Nitrile FR

General

Brand	Notrax
Category	Wet Areas Modular Matting
Product Number	650SFR
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Cushion Ease™ Nitrile FR
Recommended use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Series	Cushion-Ease®
Shipping Location	Chicago, IL 60638, United States, Barendrecht 2992SB, The Netherlands
Type	Wet/ Dry Areas - Modular Rubber Mats
Update trigger	20210310-1301
Usage Intensity	Heavy duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 1000	1.76% weight loss
Fire rating EU	EN 13501-1 Bfl-S1
Fire rating US	Pass
Hardness	55 Shore A
Slip Rating	R9
Coefficient Friction Dry	0.83
Surface Flammability	Pass

Technical Specifications

Application	Industrial Environments
Breaking Load	146.7%
Edges	Attachable bevelled edges are available
Material	100% nitrile fire retardant rubber compound
Material Group	Nitrile rubber
Process	Compression Moulding

Cushion Ease™ Nitrile FR Black

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
650SFR33BL	91cm x 91cm	10.8	1.9
650SFR00BL	per m2	11.6	1.9

Accessories

552 MD-X Ramp System™ Nitrile	INS INSTALLATION	651 M.D. Fire Retardent Ramp System	551 MD Ramp System™ Nitrile
-------------------------------	------------------	-------------------------------------	-----------------------------