


SYMPOR Tacker panel roll EPS-T 650

Heat and sound insulation of expanded Polystyrene EPS-T650, laminated with white PP ribbon fabric film, tear resistant, with a blue printed on pattern 50 x50 mm installation grid. Self adhesive strip on one side of the film allows quick and precise connecting of the panel rolls.

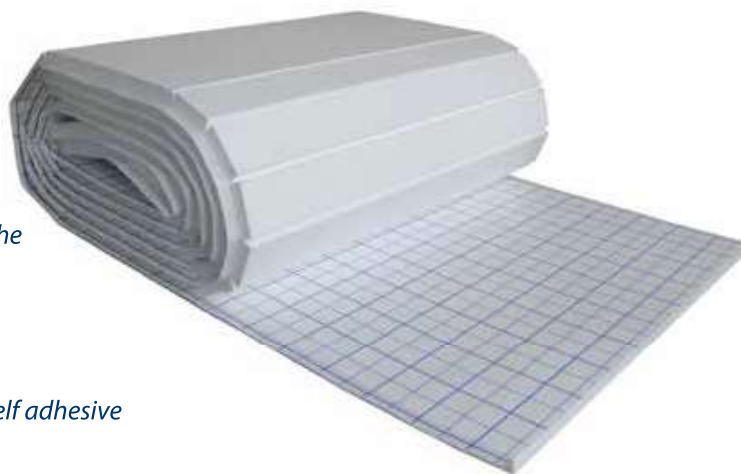

Roll format : 10000 x 1000 mm

Packaging: PE bag

Pipe installation by Tacker pipe clip, or self adhesive U profile clamp track.

Suitable for a total load of 650 kg/m²

SYMPOR Tacker panel roll EPS-T 650

Item No.	Thickness mm	Length mm	Unit m ² / Roll	Max load KN/m ²	R m ² K/W	S` MN/m ³	VM dB
500TAKR-T650-20-2	20-2	10000	10	6,5	0,5	30	27
500TAKR-T650-25-2	25-2	10000	10	6,5	0,63	30	27
500TAKR-T650-30-2	30-2	10000	10	6,5	0,75	20	29
R= Thermal resistance S`= Dynamic rigidity VM = Improvement of sound impact							

Technical data

	Unit	Value
Thermal heat conductivity group λ_D	W/mK	0,04
Flexibility resistance	kPa	≥ 50
Short term heat stability	°C	95
Long term heat stability	°C	75-80
Fire behaviour (EN 13501-1)		Euroclasse E
Classification EN 13163		EPS-T 650