

599 Oct-O-Flex™ 12 mm

Stylish rubber entrance mat



Dust Control Matting - Outdoor Contract & Installation Matting

599 Oct-O-Flex™ 12 mm

The mat has excellent adherence and adapts to any surface while the raised studs underneath allow water to easily drain through, keeping the surface clean and dry.

- Scrapes shoes to stop dirt, grit and grime from entering the building
- Unique design of small drainage holes are EU compliant for public entrances
- Made from durable rubber compounds that withstand the heaviest of foot traffic
- Its smooth surface makes it the ideal mat for wheeled access
- Easy to clean and practically weather proof

Recommended use

- Outdoor
- For placement inside entrances of hotels, shops, department stores, schools, universities, restaurants, supermarkets.
- Heavy traffic

Colors:



- Black

Sizes:

- 100cm x 150cm
- 75cm x 100cm
- per m2

Accessories:

- 599K Oct-O-Flex™ 12 mm Connectors

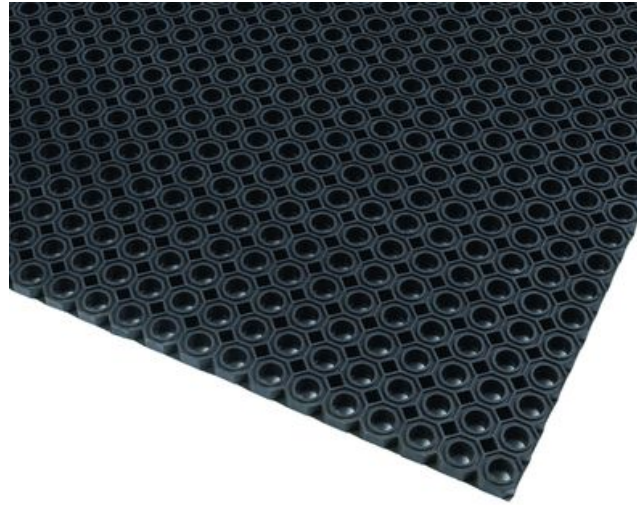

CRUSH RESISTANCE

RATING DUST CONTROL

Dust Control Matting - Outdoor Contract & Installation Matting

Oct-O-Flex™ 12 mm

General

Brand	Notrax
Category	Outdoor Contract & Installation Matting
Product Number	599
Product Family	Industrial & Commercial Matting
Product Group	Dust Control Matting
Product Name	Oct-O-Flex™ 12 mm
Recommended use	For placement inside entrances of hotels, shops, department stores, schools, universities, restaurants, supermarkets.
Shipping Location	Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Outdoor - Contract and Installation Matting
Update trigger	20210310-1301
Usage Intensity	Heavy traffic

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Reach US	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material, Contributes to a cleaner environment by reducing need of cleaning chemicals
Warranty	1

Tests

Comfort Class	LC3
Fire rating US	Pass
Sanitary Testing	Pass

Technical Specifications

Application	Industrial Environments
Edges	Bevelled rubber borders on all four sides
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

Oct-O-Flex™ 12 mm Black

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
599S3959OB	100cm x 150cm	15.5	1.2
599S0000OB	per m2	10.3	1.2
599S3039OB	75cm x 100cm	7.8	1.2

Accessories

599K Oct-O-Flex™ 12
mm Connectors